

Winstac Display (Shenzhen) Limited

Winstac Display (Shenzhen) Limited.

威世达显示器科技（深圳）有限公司

SPECIFICATION FOR LCD MODULE

MODULE NO.: LCM-TGG000177YP02-01

Customer Approval: _____

	SIGNATURE	DATE
PREPARED BY (RD ENGINEER)		
CHECKED BY		
APPROVED BY		

Addr: 4Floor, 3rd Building, Jia An Da Technology Industrial Park, Huafan
Road, Da lang, Long hua, Bao an, Shen zhen, China.

地址：深圳市宝安区龙华大浪华繁路嘉安达科技工业园3栋4楼

Tel: (+86)0755-29013593/29013776

Fax:(+86)0755 29013562

Website: [Http://www.winstac.com](http://www.winstac.com)

Winstac Display (Shenzhen) Limited

DOCUMENT REVISION HISTORY

Version	DATE	DESCRIPTION	CHANGED BY
V0	May-14-2008	First Issue	皮俊毅

Winstac Display (Shenzhen) Limited

CONTENTS

1. Features & Mechanical specifications	3
2. Absolute Maximum Ratings	4
3. DC Electrical Characteristics	4
4. Backlight Characteristics.....	4
5. Electro-Optical Characteristics.....	5
6. Touch screen characteristics.....	8
7. Dimensional Outline	9
8. Module Function Description	10
9. Reliability Testing	13
10. Quality Specification.....	14
11. Precautions for Using LCD Module.....	17

Winstac Display (Shenzhen) Limited

1. Features & Mechanical Specifications

Item	Contents	Unit
LCD Type	TFT , Negative , Transmissive	—
Viewing direction	12 o'clock	—
Backlight	White LED Backlight	—
Interface	8080 MCU 8-bit parallel interface	—
Driver IC	ST7732	—
Outline Dimension	34(W) ×45.78(H) ×3.75(MAX)(T)	mm
Viewing area (W×H)	30.03×40.1	mm
Active area (W×H)	28.03 ×35.04	mm
Number of Dots	128(RGB) × 160	—
Pixel pitch (W×H)	0.219× 0.219	mm
Operating Temperature	-20 ~ +70	°C
Storage temperature	-30 ~ +80	°C

Winstac Display (Shenzhen) Limited

2. Absolute Maximum Ratings

Item	Symbol	Condition	Min.	Max.	Unit
System Power Supply Voltage	VDD	—	-0.3	+4.6	V
Input voltage	Vin	—	-0.3	VDD+0.3	V
Operating Temperature	TOP	—	-20	+70	°C
Storage Temperature	TST	—	-30	+80	°C
Storage Humidity	HD	Ta<40°C	20	90	%RH

Note: If the module is used above these absolute maximum ratings, it may become permanently damaged. Using the module within the above electrical characteristic limit is strongly recommended for normal operation.

3. DC Electrical Characteristics

GND=0V, Ta=25°C

Item	Symbol	Condition	Min.	Typ.	Max.	Unit
Power Supply Voltage	VDD	—	2.5	2.8	3.3	V
Input High Voltage	VIH	—	0.7VDD	—	VDD	V
Input Low Voltage	VIL	—	GND	—	0.3VDD	V
Output High Voltage	VOH	—	0.8VDD	—	VDD	V
Output Low Voltage	VOL	—	GND	—	0.2VDD	V
Supply Current	ICC	VDD=2.8V	—	10	15	mA

4. Backlight Characteristics

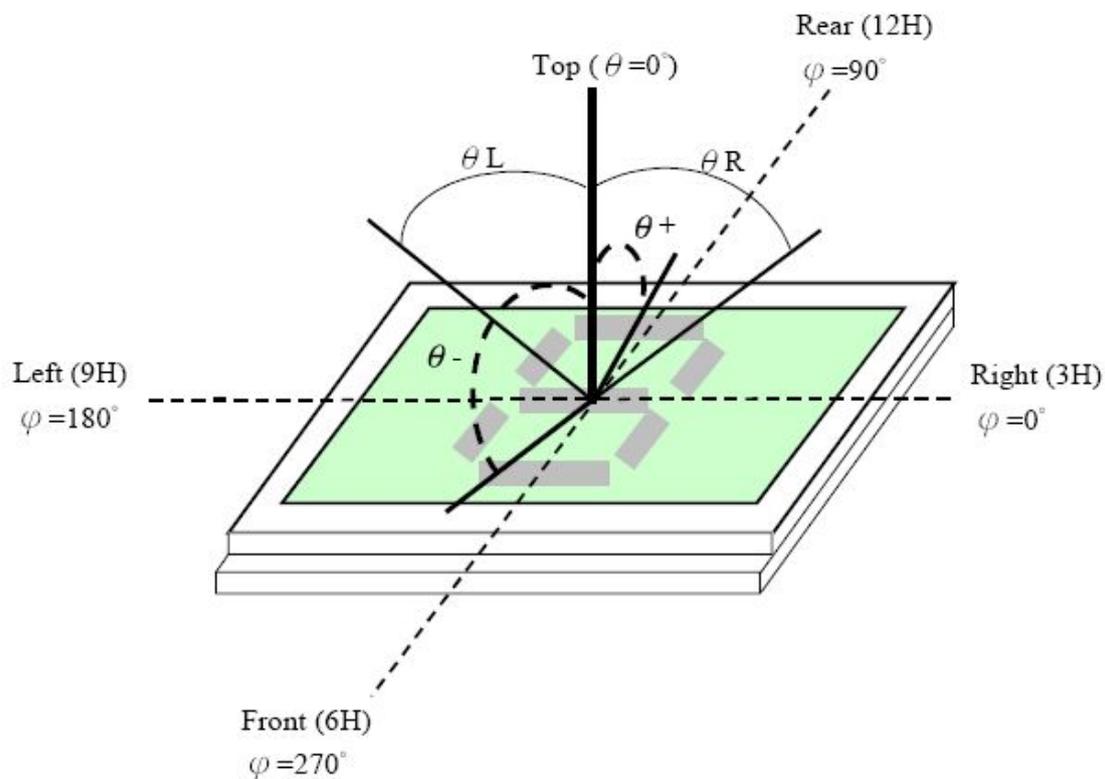
Item	Symbol	Conditions	Min.	Typ.	Max.	Unit
Forward Voltage	VF	IF=15*2mA	3.0	3.2	3.4	V
Reverse Current	IR	Vr=5V	—	—	80	μA
Average Brightness	IV	IF=15*2mA	1500	—	—	cd/m ²
CIE Color Coordinate	X	IF=15*2mA	0.265	—	0.305	—
	Y		0.265	—	0.305	—
Color	White					

Winstac Display (Shenzhen) Limited

5. Electro-Optical Characteristics

Item	Symbol	Condition	Min.	Typ.	Max.	Unit	Remark
Response time	Tr+Tf		—	45	80	ms	Reference only
Contrast ratio	CR		—	350	—	—	
Transmittance	T%		—	15.73	—	%	
Color chromaticity	White	Wx	0.285	0.305	0.325	—	
		Wy	0.310	0.330	0.350	—	
	Red	Rx	0.605	0.625	0.645	—	
		Ry	0.305	0.325	0.345	—	
	Green	Gx	0.272	0.292	0.312	—	
		Gy	0.555	0.575	0.595	—	
Blue	Bx	0.113	0.133	0.153	—		
	By	0.114	0.134	0.154	—		
Viewing angle	Hor.	θ_{x+}	—	45	—	°	
		θ_{x-}	—	45	—		
	Ver.	θ_{y+}	—	35	—	°	
		θ_{y-}	—	15	—		


5.1 Definition of Viewing Angle



Viewing angle


Winstac Display (Shenzhen) Limited

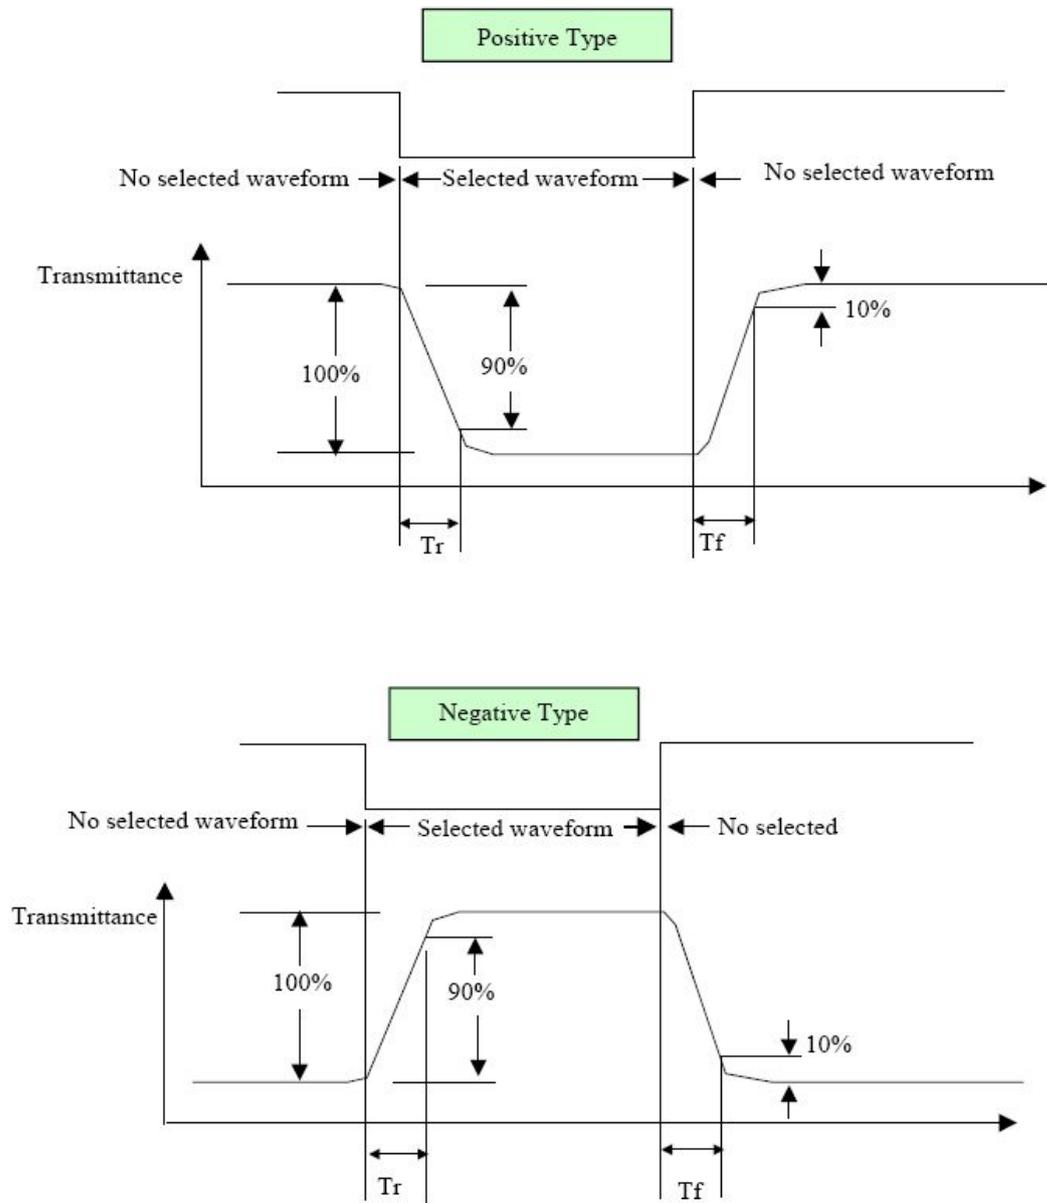5.2 Definition of Response Time



Winstac Display (Shenzhen) Limited

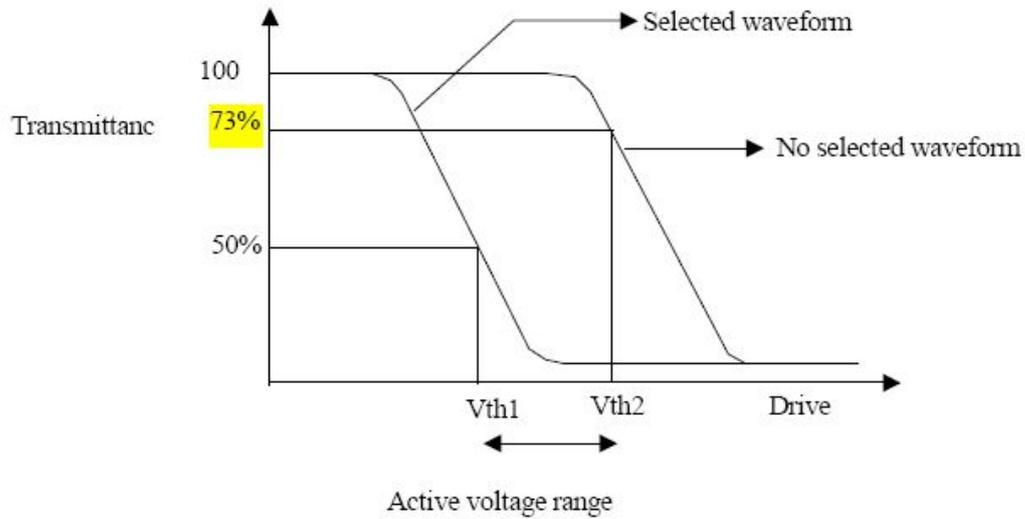
5.3 Definition of V_{th}



	V_{th1}	V_{th2}
View direction	10°	40°
Drive waveform	(Selected waveform)	(No selected waveform)
Transmittance	50%	73%

※1 Contrast ratio
 = (Brightness in OFF state) / (Brightness in ON state)

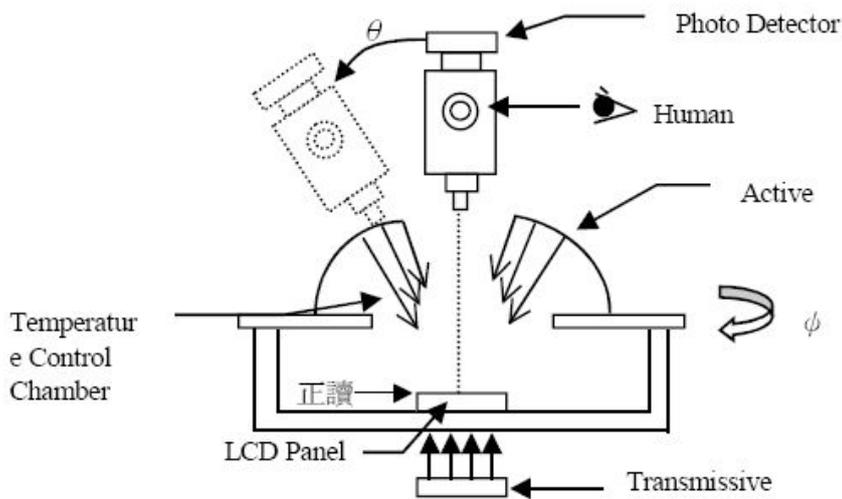Outline of Electro-Optical Characteristics Measuring System




Measuring System: Autronic DMS-803

Winstac Display (Shenzhen) Limited

6. Touch screen characteristics

Item	Specification
Input Method	ABS Pen
ITO Glass	T=0.7mm , 400 Ω / \square
ITO Film	T=0.18mm , 400 Ω / \square
Surface Hardness	铅笔硬度 2H 以上
Insulation Impedance	DC7.5V,20M Ω 以上
Light Transparency	80% min.
Linearity	\leq 1.5%
Physics Resume	<15ms
Operation Pressure	30~150g
MAX Pressure	1000gf
Operation Voltage.	5V DC. Max Voltage : 7V DC.

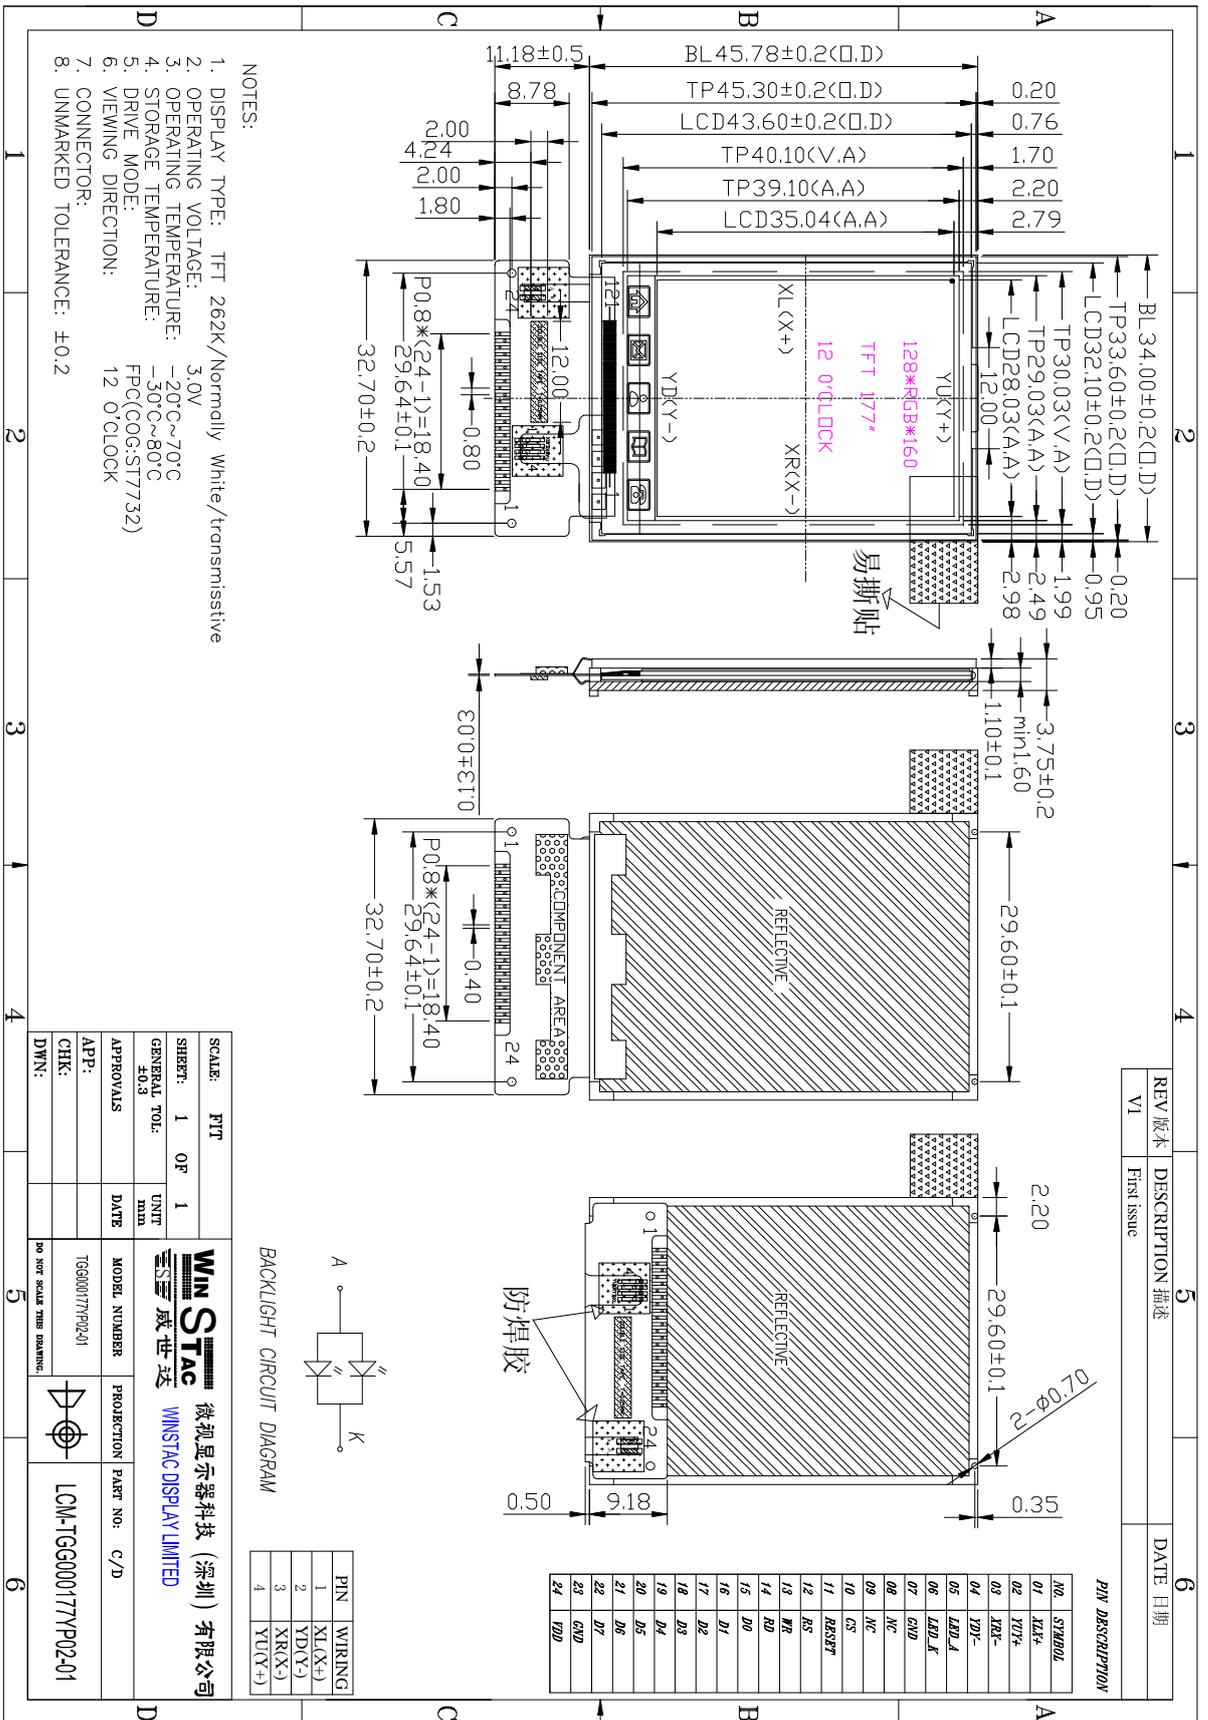
7. Dimensional Outline



Winstac Display (Shenzhen) Limited

8. Module Function Description

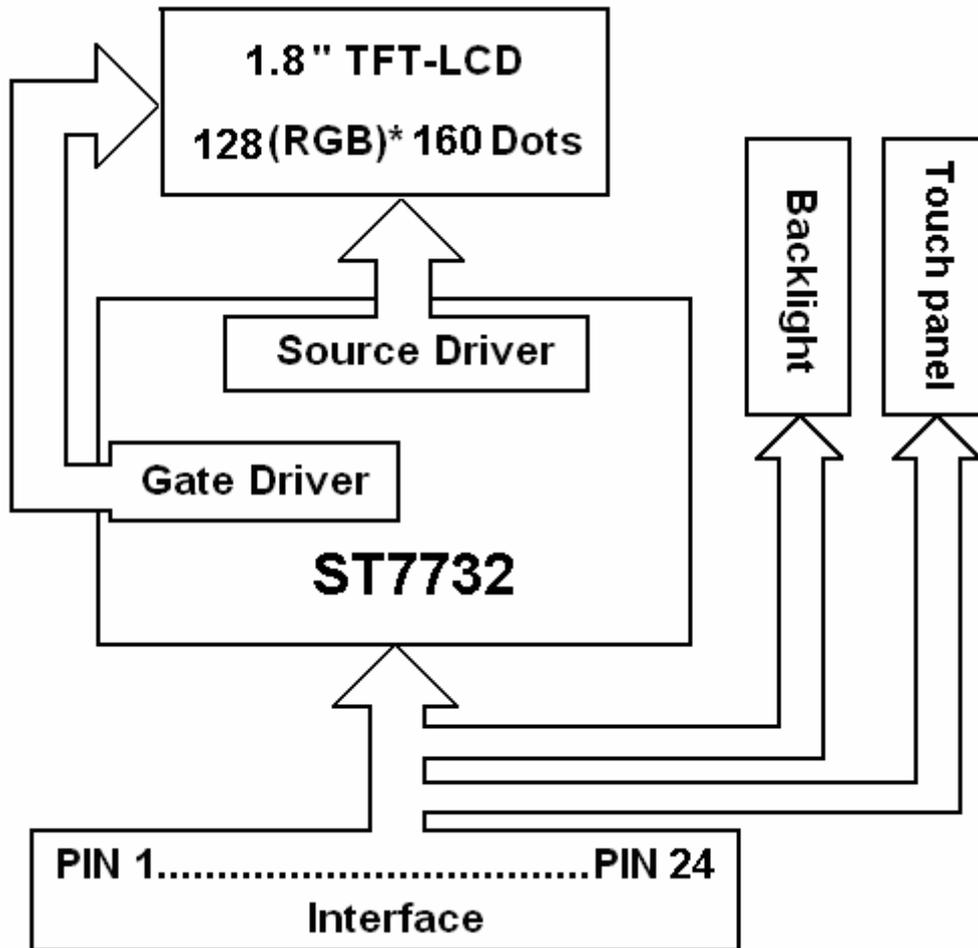8.1 Block Diagram.




Winstac Display (Shenzhen) Limited

8.2 Pin Description

No.	SYMBOL	FUNCTION
1	XL(X+)	Touch screen output terminals, if no touch screen is used, left these pins open or fix them to GND level.
2	YU(Y+)	
3	XR(X-)	
4	YD(Y-)	
5	LEDA	Power supply for backlight anode input terminal.
6	LEDK	Power supply for backlight cathode input terminal.
7	GND	Power ground.
8	NC	Not connected, left open.
9	NC	Not connected, left open.
10	/CS	Chip select signal input terminal: /CS='H' : The LCM is selected and accessible; /CS='L' : The LCM is not selected and not accessible.
11	/RESET	Reset signal input terminal. Active at 'L'.
12	RS	Display data/Command select signal input terminal: RS='L': current data on data bus is a command; RS='H': current data on data bus is display data.
13	/WR	Write control signal input, active at 'L'.
14	/RD	Read control signal input, active at 'L'.
15	DB0	8-bit bi-direction data bus.
16	DB1	
17	DB2	
18	DB3	
19	DB4	
20	DB5	
21	DB6	
22	DB7	
23	GND	Power ground.
24	VDD	System power supply terminal. (VDD>VSS)

Winstac Display (Shenzhen) Limited

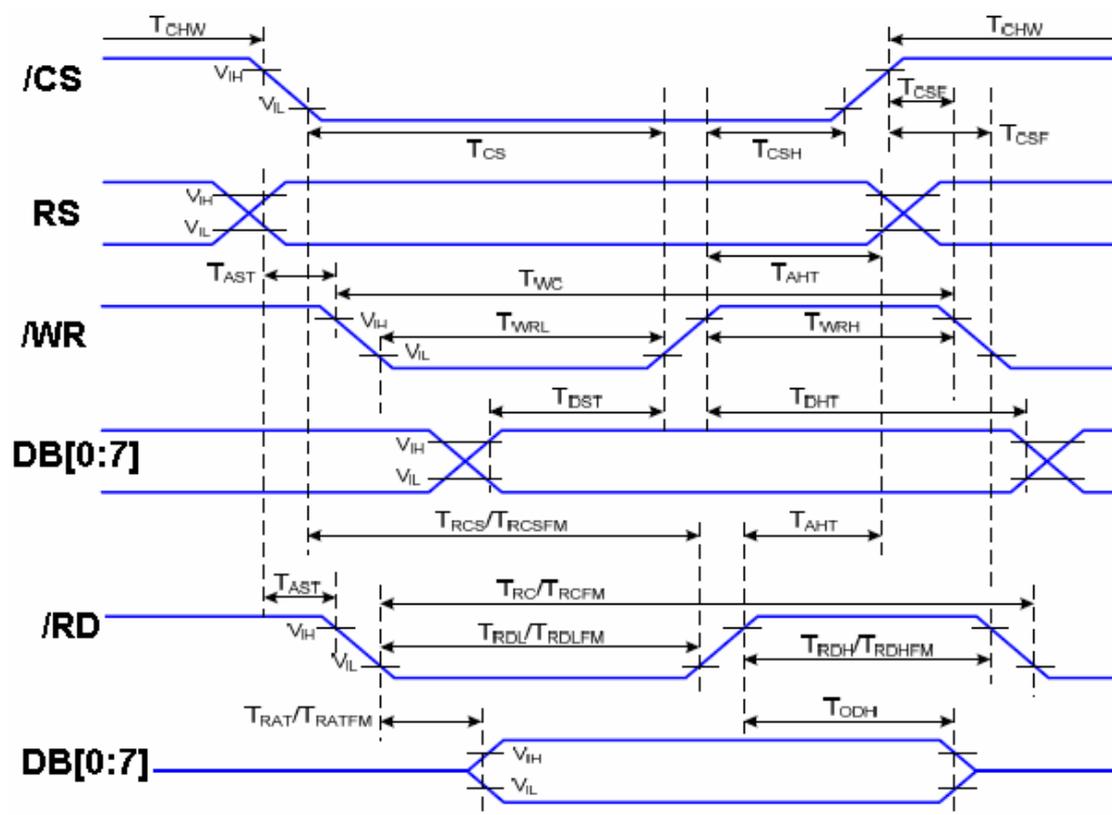8.3 Timing Characteristics



VDD=2.8V, Ta=25°C

Signal	Symbol	Parameter	Min	Max	Unit	Description
RS	T_{AST}	Address setup time	5		ns	
	T_{AHT}	Address hold time (Write/Read)	10		ns	
/CS	T_{CHW}	Chip select "H" pulse width	0		ns	-(3-transfer for one pixel)
	T_{CS}	Chip select setup time (Write)	20		ns	
	T_{RCS}	Chip select setup time (Read ID)	20		ns	
	T_{RCSFM}	Chip select setup time (Read FM)	20		ns	
	T_{CSF}	Chip select wait time (Write/Read)	10		ns	
	T_{CSH}	Chip select hold time	20		ns	
/WR	T_{WC}	Write cycle	66		ns	
	T_{WRH}	Control pulse "H" duration	25		ns	
	T_{WRL}	Control pulse "L" duration	15		ns	
/RD(ID)	T_{RC}	Read cycle (ID)	160		ns	When read ID data
	T_{RDH}	Control pulse "H" duration (ID)	90		ns	
	T_{RDL}	Control pulse "L" duration (ID)	45		ns	
/RD(FM)	T_{RCFM}	Read cycle (FM)	160		ns	When read from frame memory
	T_{RDHFM}	Control pulse "H" duration (FM)	90		ns	
	T_{RDLFM}	Control pulse "L" duration (FM)	45		ns	
DB[0:7]	T_{DST}	Data setup time	15		ns	For maximum CL=30pF For minimum CL=8pF
	T_{DHT}	Data hold time	15		ns	
	T_{ODH}	Output disable time	20	80	ns	


Winstac Display (Shenzhen) Limited

9. Reliability Testing






No.	Test Item	Test condition	Criterion
1	High Temperature Storage	80°C±2°C 96H Restore 4H at 25°C	1. After testing, cosmetic defects should not happen. 2. Total current consumption should not be over 10% of initial value.
2	Low Temperature Storage	-30°C±2°C 96H Restore 4H at 25°C	
3	High Temperature Operation	70°C±2°C 48H Restore 4H at 25°C	
4	Low Temperature Operation	-20°C±2°C 48H Restore 4H at 25°C	
5	High Temperature /Humidity Storage	40°C±2°C 90%RH 48H	
6	Temperature Cycle	-30°C ← 25°C → 80°C 5min 30min ← 25°C , 5min after 10cycle, Restore 4H at 25°C	
7	Vibration Test (package state)	10Hz~150Hz, 100m/s ² , 120min	Not allowed cosmetic and electrical defects.
8	Shock Test (package state)	Half- sine wave, 300m/s ² , 18ms	
9	Atmospheric Pressure Test	25kPa 16H Restore 2H	
10	Cable Bending Test	Bending area and angle follow design document requirement	More than 50000 times

Winstac Display (Shenzhen) Limited




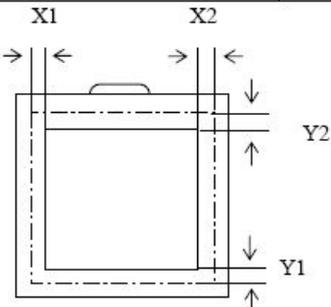
10. Quality Specification

	Note		
General	1. Should any defects which are not specified in this standard happen, additional standard shall be determined by mutual agreement between customer and Tianma. 2. Viewing Area should be the area which Tianma guarantees. 3. Limited sample should be prior to this Inspection standard. 4. Viewing Judgement should be under static pattern. 5. Inspection conditions Inspection distance : 250 mm (from the sample) Temperature : 25±5℃ Inspection angle : 45degrees in LCD view direction		
Definitions of Inspection items	Pinhole, Bright spot, Black spot, White spot, Black line, White Line, Foreign particle, Bubble	The color of a small area is different from the remainder. The phenomenon dose not change with voltage.	
	Contrast variation	The color of a small area is different from the remainder. The phenomenon changes with voltage.	
	Polarizer defect	Scratch, Dirt, Particle, Bubble on polarizer or between polarizer and glass.	
	Glass defect	Glass crack, Shaved corner of glass, Surplus glass	
Definitions of Inspection ranges	 <p style="text-align: center;">Dividing A zone and B zone proceed to make a judgment.</p> <p>A zone : Inside Viewing area B zone : Outside Viewing area X1(A.A~V.A): mm X2(A.A~V.A): mm Y1(A.A~V.A): mm Y2(A.A~V.A): mm</p>		
Outgoing Inspection standard	Inspection level II Normal Inspection Sampling standard conforms to GB2828		
	Rank	Inspection Item	AQL(Number of defective LCMs counted)
	Major defect	All Functional defects(Such as No display, Display abnormally, Open or missing segment, Short circuit, Missing component, No sound, Blight abnormally),Outline dimension beyond the drawing	0.65
Minor defect	Appearance defects, such as Black/White spot, Bright spot, Pinhole, Black/White line, Contrast variation, Bubble Glass defect, Polarizer defect, and so on. Details of the standard as follows.	1.50	

Winstac Display (Shenzhen) Limited

Inspection item		Judgement standard					
		Category		Acceptable number			
				A zone	B zone		
1	Black spot, White spot Bright Spot, Pinhole Foreign Particle, Bubble and Particle $\Phi=(a+b)/2(\text{mm})$ Between polarizer and glass, Scratch on polarizer			A	$\Phi \leq 0.15$	Neglecte	Neglected
				B	$0.15 < \Phi \leq 0.20$	2	
				C	$0.20 < \Phi \leq 0.30$	1	
				D	$0.30 < \Phi$	0	
				Total defective point(B,C)		3	
2	Black line, White line, Bubble and Particle Between Polarizer and glass, Scratch on polarizer			A	$W \leq 0.10$	Neglected	Neglected
				B	$0.01 < W \leq 0.03$ $L \leq 3.0$	2	
				C	$0.03 < W \leq 0.05$ $L \leq 3.0$	1	
				D	$0.05 < W$	0	
						Total defective point(B,C)	
3	Contrast variation			A	$\Phi \leq 0.2$	Neglected	Neglected
				B	$0.2 < \Phi \leq 0.3$	2	
				C	$0.3 < \Phi \leq 0.4$	1	
				D	$0.4 < \Phi$	0	
						Total defective point(B,C)	
4	Bubble inside cell			any size		none	none
5	Polarizer defect (if Polarizer is used)	Scratch and damage on polarizer, Particle on polarizer or between polarizer and glass.		Refer to item 1 and item 2.			
		Bubble, dent and convex		A	$\Phi \leq 0.3$	Neglected	Neglected
				B	$0.3 < \Phi \leq 0.7$	2	
				C	$0.7 < \Phi$	0	
				Total defective point(B,C)		2	
6	Surplus glass	①Stage surplus glass 		$b \leq 0.3\text{mm}$			
		②Surrounding surplus glass 		Should not influence outline dimension and assembling.			

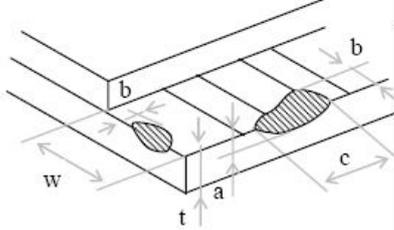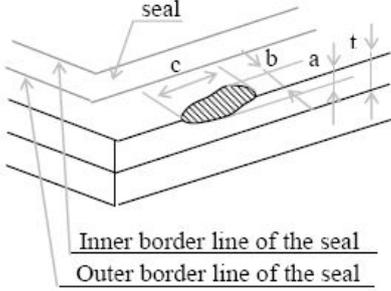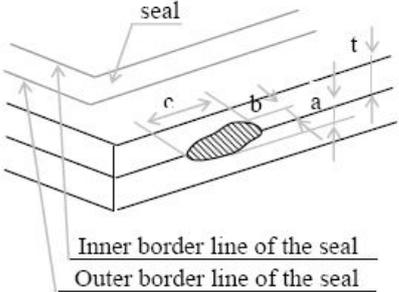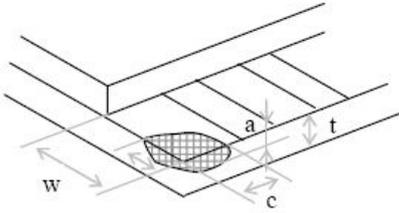Winstac Display (Shenzhen) Limited

Inspection item		Judgment standard										
		Category(application: B zone)										
7	Glass defect crack	①The front of lead terminals		<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="text-align: center;">A</td> <td>If $a \leq t$ and $b \leq 1.0$, c is not limited</td> </tr> <tr> <td style="text-align: center;">B</td> <td>$a \leq t$, $1 \leq b \leq 2\text{mm}$, $c \leq 3\text{mm}$</td> </tr> <tr> <td style="text-align: center;">C</td> <td>If glass crack cover alignment mark, $b \leq 0.5\text{mm}$.</td> </tr> <tr> <td style="text-align: center;">D</td> <td>Crack at two sides of lead terminals should not cover patterns and alignment mark</td> </tr> </table>	A	If $a \leq t$ and $b \leq 1.0$, c is not limited	B	$a \leq t$, $1 \leq b \leq 2\text{mm}$, $c \leq 3\text{mm}$	C	If glass crack cover alignment mark, $b \leq 0.5\text{mm}$.	D	Crack at two sides of lead terminals should not cover patterns and alignment mark
		A	If $a \leq t$ and $b \leq 1.0$, c is not limited									
		B	$a \leq t$, $1 \leq b \leq 2\text{mm}$, $c \leq 3\text{mm}$									
		C	If glass crack cover alignment mark, $b \leq 0.5\text{mm}$.									
D	Crack at two sides of lead terminals should not cover patterns and alignment mark											
②Surrounding crack—non-contact side	 <p style="text-align: center;">Inner border line of the seal Outer border line of the seal</p>	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="text-align: center;">b < Inner borderline of the seal</td> </tr> </table>	b < Inner borderline of the seal									
b < Inner borderline of the seal												
③ Surrounding crack— contact side	 <p style="text-align: center;">Inner border line of the seal Outer border line of the seal</p>	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="text-align: center;">b < Outer borderline of the seal</td> </tr> </table>	b < Outer borderline of the seal									
b < Outer borderline of the seal												
④Corner		<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="text-align: center;">A</td> <td>$a \leq t$, $b \leq 3.0$, $c \leq 3.0$</td> </tr> <tr> <td colspan="2">*Glass crack should not cover patterns used for</td> </tr> </table>	A	$a \leq t$, $b \leq 3.0$, $c \leq 3.0$	*Glass crack should not cover patterns used for							
A	$a \leq t$, $b \leq 3.0$, $c \leq 3.0$											
*Glass crack should not cover patterns used for												

11. Precautions for Using LCD Module

11.1 Handing Precautions

- (1) The display panel is made of glass. Do not subject it to a mechanical shock or impact by dropping it.
- (2) If the display panel is damaged and the liquid crystal substance leaks out, be sure not to get any in your mouth. If the substance contacts your skin or clothes, wash it off using soap and water.
- (3) Do not apply excessive force to the display surface or the adjoining areas since this may cause the color tone to vary.
- (4) The polarizer covering the display surface of the LCD module is soft and easily scratched. Handle this polarizer carefully.
- (5) If the display surface becomes contaminated, breathe on the surface and gently wipe it with a soft dry cloth. If it is heavily contaminated, moisten a cloth with one of the following solvents:
 - Isopropyl alcohol
 - Ethyl alcohol
- (6) Solvents other than those above mentioned may damage the polarizer. Especially, do not use the following:
 - Water
 - Ketone
 - The LCD Module is coated with - Aromatic solvents
- (7) Extra care to minimize corrosion of the electrode. Water droplets, moisture condensation or a current flow in a high-humidity environment accelerates corrosion of the electrode.
- (8) Install the LCD Module by using the mounting holes. When mounting the LCD Module, make sure it is free of twisting, warping and distortion. In particular, do not forcibly pull or bend the I/O cable or the backlight cable.
- (9) Do not attempt to disassemble or process the LCD Module.
- (10) NC terminal should be open. Do not connect anything.
- (11) If the logic circuit power is off, do not apply the input signals.
- (12) To prevent destruction of the elements by static electricity, be careful to maintain an optimum work environment.
 - Be sure to ground the body when handling the LCD Module.
 - Tools required for assembling, such as soldering irons, must be properly grounded.
 - To reduce the amount of static electricity generated, do not conduct

Winstac Display (Shenzhen) Limited

assembling and other work under dry conditions.

- The LCD Module is coated with a film to protect the display surface. Exercise care when peeling off this protective film since static electricity may be generated.

11.2 Precaution For Soldering To The LCM

Observe the following when soldering lead wire, connector cable and etc. to the LCM.

- Soldering iron temperature: $280 \pm 10^{\circ}\text{C}$.
- Soldering time: 3-4 sec.
- Solder: eutectic solder.

If soldering flux is used, be sure to remove any remaining flux after finishing to soldering operation. (This does not apply in the case of a non-halogen type of flux.) It is recommended that you protect the LCD surface with a cover during soldering to prevent any damage due to flux spatters.

When soldering the electroluminescent panel and PC board, the panel and board should not be detached more than three times. This maximum number is determined by the temperature and time conditions mentioned above, though there may be some variance depending on the temperature of the soldering iron.

When removing the electroluminescent panel from the PC board, be sure the solder has completely melted, otherwise the soldered pad on the PC board could be damaged.

11.3 Precaution For Operation

- (1) Viewing angle varies with the change of liquid crystal driving voltage (V_0). Adjust V_0 to show the best contrast.
- (2) Driving the LCD in the voltage above the limit will shorten its lifetime.
- (3) Response time is greatly delayed at temperature below the operating temperature range. However, this does not mean the LCD will be out of the order. It will recover when it returns to the specified temperature range.
- (4) If the display area is pushed hard during operation, the display will become abnormal. However, it will return to normal if it is turned off and then on.
- (5) Condensation on terminals can cause an electrochemical reaction disrupting the terminal circuit. Therefore, it must be used under the relative condition of 40°C , 50% RH.
- (6) When turning the power on, input each signal after the positive/negative voltage becomes stable.

Winstac Display (Shenzhen) Limited

11.4 Precaution For Storage

When storing LCDS as spares for some years, the following precaution are necessary.

Store them in a sealed polyethylene bag. If properly scaled, there is no need for desiccant.

Store them in a dark place. Do not expose to sunlight or fluorescent light, keep the temperature between 0°C and 35°C.

The polarizer surface should not come in contact with any other objects. (We advise you to store them in the container in which they were shipped.)

Environmental conditions:

- Do not leave them for more than 168hrs. at 60 °C.
- Should not be left for more than 48hrs. at -20 °C.

11.5 Safety

It is recommended to crush damaged or unnecessary LCDs into pieces and wash them off with solvents such as acetone and ethanol, which should later be burned.

If any liquid leaks out of a damaged glass cell and comes in contact with the hands, wash off thoroughly with soap and water.

11.6 Limited Warranty

Unless agreed between Matrix and customer, Matrix will replace or repair any of its LCD and modules which are found to be functionally defective when inspected in accordance with Matrix LCD acceptance standards (copies available upon request) for a period of one year from date of shipments. Cosmetic/visual defects must be returned to Matrix within 90 days of shipment. Confirmation of such date shall be based on freight documents. The warranty liability of Matrix is limited to repair and/or replacement on the terms set forth above. Matrix will not be responsible for any subsequent or consequential events.